

AG Series

Standard Brackish Water RO Elements



The A-Series, family of proprietary thin-film reverse osmosis membrane elements are characterized by high flux and high sodium chloride rejection. AG Standard Brackish Water Elements are selected when high rejection and operating pressures as low as 200 psi (1,379 kPa) are desired. These elements allow moderate energy

Table 1: Element Specification

Membrane	A-Series, Thin-Film Membrane (TFM*)		
Model	permeate flow gpd (m ³ /day) ^{1,2}	rejection ^{1,2}	rejection ^{1,2}
AG4040FM WET	2,200 (8.3)	99.5%	99.0%
AG4040NM	2,200 (8.3)	99.2%	98.5%
AG4040TM	2,200 (8.3)	99.5%	99.0%
AG8040C	9,900 (37.3)	99.5%	99.0%
AG8040F	9,600 (36.3)	99.5%	99.0%
AG8040F WET	9,600 (36.3)	99.5%	99.0%
AG8040F 400	10,500 (39.8)	99.5%	99.0%
AG8040F 400 WET	10,500 (39.8)	99.5%	99.0%
AG8040N	9,600 (36.3)	99.2%	98.5%
AG8040N 400	10,500 (39.8)	99.2%	98.5%

¹ Average salt rejection after 24 hours operation. Individual flow rate may vary +25%/-15%.

² Testing conditions: 2,000 ppm NaCl solution at 225 psi (1,551 kPa) operating pressure, 77°F (25°C), pH 7.5 and 15% recovery.

Model	Membrane area ft ² (m ²)	Outer wrap	Part number US ¹	Part number Other plants ²
AG2540FM	29 (2.6)	Fiberglass	1206727	N/A
AG2540TM	29 (2.6)	Tape	1206729	N/A
AG4025T	60 (5.6)	Tape	1206754	N/A
AG4026F	60 (5.6)	Fiberglass	1206756	N/A
AG4040C	90 (8.4)	Cage	1206757	N/A
AG4040CM	90 (8.4)	Cage	1206759	N/A
AG4040FM	85 (7.9)	Fiberglass	1206761	3032513
AG4040FM WET	85 (7.9)	Fiberglass	3013808	3035659
AG4040NM	85 (7.9)	Net	1231785	N/A
AG4040TM	85 (7.9)	Tape	1206774	3032514
AG8040C	380 (35.3)	Cage	1222546	N/A
AG8040F	365 (33.9)	Fiberglass	1206779	3032515
AG8040F WET	365 (33.9)	Fiberglass	1239765	3032516
AG8040F 400	400 (37.2)	Fiberglass	1206784	3032518
AG8040F 400 WET	400 (37.2)	Fiberglass	1239764	3032519
AG8040N	365 (33.9)	Net	1231784	N/A
AG8040N 400	400 (37.2)	Net	1231786	N/A

²These elements are rolled in China, India and Hungary.

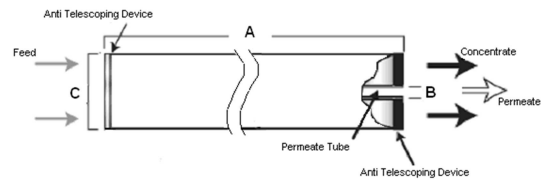


Figure 1: Element Dimensions Diagram – Female

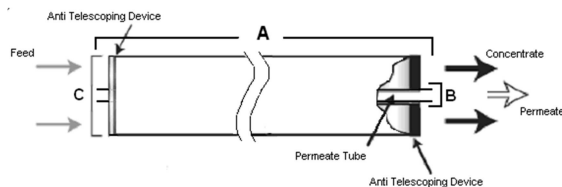


Figure 2: Element Dimensions Diagram – Male

a product of
ecomagination™



Contact us for GE membranes, Purotrex, Hytrex, Aquatrex, RO Save Zplex filters.

www.gemembranes.com
www.bigmembrane.com
www.codelinehousings.com
www.eastemro.com
 910-612-6700

Table 2: Dimensions and Weight

Model ¹	Dimensions, inches (cm)			Boxed
	A	B ²	C ³	Weight lbs (kg)
AG2540FM	40.0 (101.6)	0.75 (1.90) OD	2.4 (6.1)	5 (2.3)
AG2540TM	40.0 (101.6)	0.75 (1.90) OD	2.4 (6.1)	5 (2.3)
AG4025T	25.0 (63.5)	0.625 (1.59)	3.9 (9.9)	5 (2.3)
AG4026F	26.0 (66.7)	0.625 (1.59)	3.9 (9.9)	6 (2.7)
AG4040C	40.0 (101.6)	0.625 (1.59)	3.9 (9.9)	8 (3.5)
AG4040CM	40.0 (101.6)	0.75 (1.90) OD	3.9 (9.9)	8 (3.5)
AG4040FM	40.0 (101.6)	0.75 (1.90) OD	3.9 (9.9)	8 (3.5)
AG4040FM	40.0 (101.6)	0.75 (1.90) OD	3.9 (9.9)	8 (3.5)
WET	40.0 (101.6)	0.75 (1.90) OD	3.9 (9.9)	8 (3.5)
AG4040NM	40.0 (101.6)	0.75 (1.90) OD	3.9 (9.9)	8 (3.5)
AG4040TM	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	32 (14.5)
AG8040C	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	32 (14.5)
AG8040F	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	35 (16)
AG8040F WET	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	32 (14.5)
AG8040F 400	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	35 (16)
AG8040F 400 WET	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	32 (14.5)
AG8040N	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	32 (14.5)

AG8040N 400

¹ These elements are bagged dried, unless specified WET, before shipping.²Internal diameter unless specified OD (outside diameter).³The element diameter (dimension C) is designed for optimum performance in GE pressure vessels. Other pressure vessel dimension and tolerance may result in excessive bypass and loss of capacity.**Table 3: Operating and CIP parameters**

Typical Operating Pressure	200 psi (1,379 kPa)
Typical Operating Flux	10-20GFD (15-35LMH)
Maximum Operating Pressure	Tape 450 psi (3,103 kPa) Other outerwrap: 600 psi (4,137 kPa)
Maximum Temperature	Continuous operation: 122°F (50°C) Clean-In-Place (CIP): 122°F (50°C)
pH Range	Optimum rejection: 7.0-7.5, Continuous operation: 4.0-11.0, Clean-In-Place (CIP): 2.0-11.5
Maximum Pressure Drop	Over an element: 12 psi (83 kPa) Per housing: 50 psi (345 kPa)
Chlorine Tolerance	1,000+ ppm-hours, Dechlorination recommended
Feedwater	NTU < 1 SDI < 5